

SHEAR BOLTS

Hexagonal part shears off under torque, leaving a tamper resistant cone.

Non Removable, high security bolt.

Stocked in Stainless steel. Zinc plated and galvanised can be made to order subject to minimum order quantities.

No specialist tools required - installed with a standard socket or spanner.

LEVEL 3:
Maximum Security

Can be installed with the following tools:

Spanner




PART NO.	DRIVE SIZE	LB/FT	SHEAR	NM	MATERIAL	\$/ea	\$/100
SHBM616-A2	16mm	5 - 9		7 - 14	304 S/S	\$5.00	\$400.40
SHBM625-A2	25mm	5 - 9		7 - 14	304 S/S	\$6.26	\$500.85
SHBM650-A2	50mm	5 - 9		7 - 14	304 S/S	\$9.38	\$750.40



PART NO.	DRIVE SIZE	LB/FT	SHEAR	NM	MATERIAL	\$/ea	\$/100
SHBM825-A2	16mm	10 - 15		14 - 20	304 S/S	\$9.09	\$727.13
SHBM860-A2	25mm	10 - 15		14 - 20	304 S/S	\$16.74	\$1,339.45

INSTALLATION INSTRUCTIONS

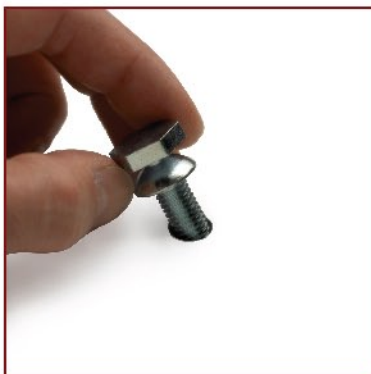

1 Insert Shear Bolt into application



2 Tighten using standard spanner



3 Hex part shears off at set torque to leave a smooth permanent flush